



Плазменная панель (MPDP, Multi-PDP)

модель OPM-4260X

с поддержкой технологии **HDbas@T™**

5Play™



Видео



Аудио



Интернет




Питание



Управление

Один кабель для универсального подключения

Технология коммутации HDBaseT позволяет вести коммутацию всех устройств отображения информации, поддерживающих стандарт 5Play™. Благодаря этой технологии, по единому кабелю возможно передавать не сжатый цифровой видео сигнал в формате полного HD, аудио сигнал, сигнал 100BaseT Ethernet, питание до 100Вт и различные сигналы управления системой. При этом используется обычный CAT5e/6 кабель до 100 м. (328ft) с коннекторами RJ45.



Матричный коммутатор
HDBaseT

Видео+управление+Интернет



CAT5e/6 Cable

Передача сигнала до 100 метров
Удешевление стоимости готовой
инсталляции (монтажа)




Панели MPDP | MLCD Серии X



Плазменная MPDP (Multi-PDP) панель OPM-4260X (X - серия)

Новая плазменная модель от Orion PDP - OPM 4260X (X-серия) имеет ряд преимуществ:

- межмодульный шов всего **1,9 мм.**
- увеличенная яркость (**1 700 cd**) и контрастность (**30 000 : 1**)
- уменьшенное энергопотребление (**210 Вт** в рабочем режиме)
- интегрированный **HDBaseT порт** (возможность передавать не сжатое FullHD видео, сигналы управления и питание по единому кабелю CAT5e/6 на расстояния до 100 м.)

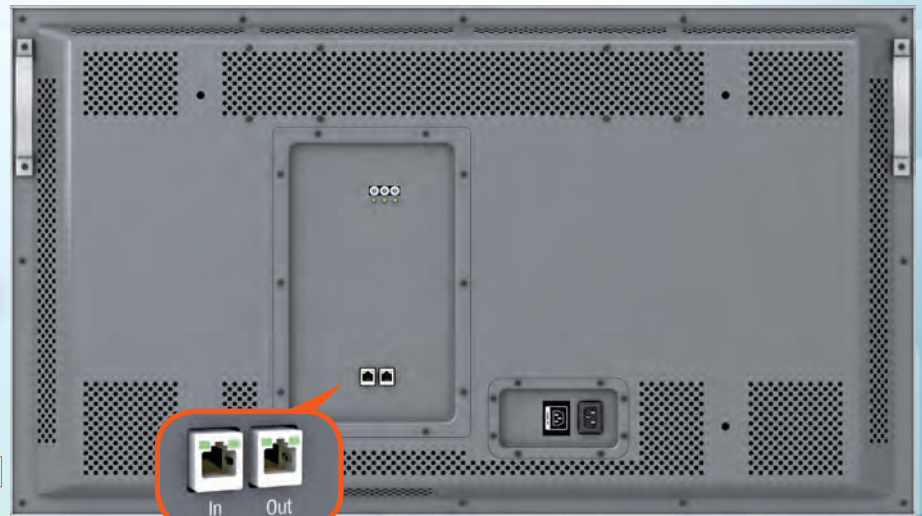

HDBaseT

• Технические характеристики

Product Name		42" Multi-PDP Monitor
Model Name		OPM-4260X
Power Supply		AC100V ~ 240V ± 10% (50/60Hz)
Power Consumption	Max	330W
	Average (On Mode)	210W (Based on IEC 62087 Ed.2 measurement method)
	Stand-By	9.0W
Luminance(Max)		1,700 cd / m ² (Without Film Filter) ^{NOTE 1} , (Max, 1% White Window)
Contrast ratio (Dark Room)		30,000 : 1 ^{NOTE 1} (Max)
Seam Gap (Multi Configuration)		1.9mm ± 0.2mm
Active Display Area		921.5(H) X 518.8(V) mm
Ratio		16:09
Pixel		853 (H) X 480 (V)
Pixel Pitch		1.08 X 1.08 mm
Display Colors		10bit(R) 1,024 × (G)1,024 × (B)1,024 colors (1.073 billion)
Input Signal	PC / DVI Signal (Support HDCP)	VGA, SVGA, XGA, SXGA, UXGA, WXGA, 480P,576P,720P(50/60),1080i(50/60),1080P(50/60)
	Video Signal	NTSC, PAL, SECAM
	Frequency	H : 31.5 ~ 75kHz, V : 50 , 60 Hz
In/Output Terminal	Input	HDBaseT x 1, DVI-D x 1, PC x 1, Video x 1, RS-232C x 1, LAN x1, Service x 1
	Output	HDBaseT x 1, DVI-D x 1, PC x 1, Video x 1, RS-232C x 1
Dimension (W x H x D)		923.4 x 520.7 x 73.0mm
Weights		21Kg (±0.2Kg)

※ The Information Described in this Specification is Preliminary and can be changed without prior notice.